


VALVES BALL VALVES (REGULAR/T-HANDLE)

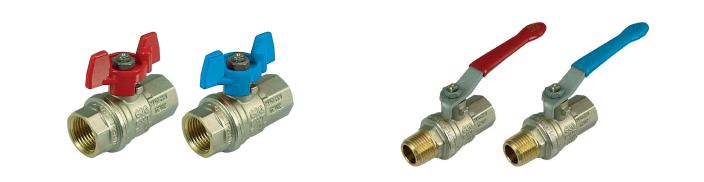

Technical Description:

Mouldpro provides a variety of high quality valves in different sizes, with different options for handles, both in terms of size, colour and materia.

For the regular/T-handle valves:

- No metal-to-metal moving parts
- No maintenance ever required
- Silicone-free lubricants on all seals
- Chrome plated brass ball for longer life
- Each valve is seal tested for maximum safety
- Handle clearly shows ball position
- Dual sealing system allows for valve to be operated in either direction, making installation easier.

Properties:

Operating temperature:	-20°C to +170°C
Maximum operating pressure:	40 bar
Thread:	EN 10226-1, ISO 228
	Male thread: BSPT
	Female Thread: BSPP
Flow:	Full port to DIN 3357 for maximum flow

Materials:

Body:	Nickel Plated Brass
Stem:	Brass (with FPM O-ring)
Seals:	PTFE (self-lubricating seals)
Handle (Regular):	Carbon steel handle with PVC dip coating
Handle (T-shaped):	Aluminium

